



HYDROFIRE ΕΠΕ

Buildings - Industry - Marine – Waterworks

END OF AG. PANTELEIMONOS Str. (ELEONAS)

GR-12241 EGALEO,

Tel.: +30 210 3412 749-750 Fax: +30 210 3412 406

www.hydrofire.gr, email: info@hydrofire.gr



Ref. : CR 3201 pas

Rev. : Initial

Date : 22/10/2013

Page : 1/1

STRAINER

CR 3201



APPLICATION

General use : for all common fluids.

GENERAL CHARACTERISTICS

From DN3/8" to DN 4".
Stainless steel threaded male BSP.
Stainless steel mesh.


CONSTRUCTION

2	Mesh	Stainless steel 316
1	Threaded	Stainless steel 316
Pos.	Description	Material



DIMENSIONS

DN		H	ØA	Mesh	Weight (kg)
mm	inch				
10	3/8"	51	21	1,2	0,011
15	1/2"	55	23	1,2	0,015
20	3/4"	62	29	1,2	0,025
25	1"	69	37	1,2	0,037
32	1"1/4	80	44	1,2	0,055
40	1"1/2	89	49	1,2	0,067
50	2"	101	61	1,2	0,084
65	2"1/2	114	80	1,5	0,135
80	3"	126	96	1,5	0,169
100	4"	144	116	2,0	0,243

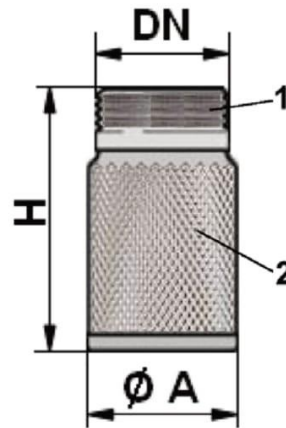

WORKING CONDITIONS

Maximum working temperature : -20°C / +150°C

STANDARDS

Fabrication according to ISO 9001 :2000
Threaded male BSP cylindrical end according to ISO 228-1.

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.